



SYNTHETIC ENGINE OIL

5w30 Fully Synthetic Longlife

Specifications: API SN/CF, ACEA C3

Carlube 5w30 is a Fully Synthetic low SAPS oil suitable for vehicles out of warranty requiring a Fully Synthetic longlife.



SIZE	PART No.	BARCODE
1 L	XAP010	5010373044681
4.55 L	XAP455	5010373055304
20 L	YAP020	5010373054840
199 L	YAP199	5010373044711

5w40 Fully Synthetic

Specifications: API SM/CF, ACEA A3/B3

Carlube 5w40 is a Fully Synthetic oil suitable for modern petrol and diesel engines designed to keep engines clean and prolong life.



SIZE	PART No.	BARCODE
1 L	XAK010	5010373035283
4.55 L	XAK455	5010373055311
20 L	YAK020	5010373054857
199 L	YAK199	5010373041451

5w30 Semi-Synthetic

Specifications: API SL/CF, ACEA A1/B1
Meets the requirements of:
Ford M2C-913-A/B

Carlube 5w30 is a Semi-Synthetic oil suitable for pre-2007 Ford Zetec petrol and diesel engines and the Duratorq diesel engine.



SIZE	PART No.	BARCODE
1 L	XAH010	5010373035245
4.55 L	XAH455	5010373055328
20 L	YAH020	5010373054802
199 L	YAH199	5010373041437

10w40 Semi-Synthetic

Specifications: API SL/CF, ACEA A3/B3

Carlube 10w40 is a Semi-Synthetic oil suitable for use with turbo-chargers in petrol and diesel engines and with multi-valve, fuel injected and multi-cam engines.



SIZE	PART No.	BARCODE
1 L	XAJ010	5010373035269
4.55 L	XAJ455	5010373055335
20 L	YAJ020	5010373054796
199 L	YAJ199	5010373040850

10w40 Semi-Synthetic Diesel

Specifications: API SL/CF, ACEA A3/B3

Carlube 10w40 is a Semi-Synthetic Diesel oil providing protection for all high performance light-medium vehicles.



SIZE	PART No.	BARCODE
1 L	XAM010	5010373038741
4.55 L	XAM455	5010373055342
20 L	YWS020	5010373054864
199 L	YWS199	5010373038574

15w40 Semi-Synthetic

Specifications: API SL/CF-4, ACEA A3/B3/B4/E3/E5/E7

Carlube 15w40 Semi-Synthetic is suitable for light commercial petrol and diesel engines, as well as heavy duty commercial vehicles.



SIZE	PART No.	BARCODE
1 L	XAL010	5010373035726
4.55 L	XAL455	5010373055359
20 L	YAL020	5010373054871
199 L	YAL199	5010373038567



MINERAL ENGINE OIL

10w30 Mineral

Specifications: API SL/CF, ACEA A2/B2

Carlube 10w30 Mineral oil is a low viscosity, high quality motor oil, originally designed for early Ford Zetec engines and widely used in high mileage Ford engines.



SIZE	PART No.	BARCODE
1 L	XPS010	5010373035221
4.55 L	XPS455	5010373055373
20 L	YFF020	5010373054888

10w40 Mineral

Specifications: API SL/CF, ACEA A2/B2

Carlube 10w40 Mineral oil is designed for use in modern engines which require a lighter oil, yet still need the best protection.



SIZE	PART No.	BARCODE
1 L	XPL010	5010373035207
4.55 L	XPL455	5010373055380
20 L	YFB020	5010373054895
199 L	YFB199	5010373027486

15w40 Mineral

Specification: API SL/CF, ACEA A3/B3/B4

Carlube 15w40 Mineral is suitable for use in higher mileage engines including naturally aspirated and turbo-charged vehicles.



SIZE	PART No.	BARCODE
1 L	XPP010	5010373035160
4.55 L	XPP455	5010373055397
20 L	YFA020	5010373054901
199 L	YFA199	5010373027479

15w40 Diesel Mineral

Specification: API CH-4/SL, ACEA A3/B3/B4/E3/E5

Carlube 15w40 Diesel Mineral is a specialist oil meeting the demands of modern diesel engines, both naturally aspirated and turbo-charged.



SIZE	PART No.	BARCODE
1 L	XDP010	5010373035184
4.55 L	XDP455	5010373055403
20 L	YFH020	5010373054918
199 L	YFH199	5010373027516

20w50 Daytona Mineral

Specifications: API SE/CC

Carlube Daytona is a top quality 20w50 mineral oil suitable for both petrol and diesel engines. This oil is not suitable for turbo-charged engines.



SIZE	PART No.	BARCODE
1 L	XDA001	5010373001905
4.55 L	XDA455	5010373896303

HD30

Specifications: API SE/CC, MILL-L-2104B, MIL-L-46152, CCMC D1

Carlube HD30 is an SAE30 mineral oil, suitable for use in older engines. This oil can be used in smaller engines such as lawnmowers or classic cars such as the older VW Beetles.



SIZE	PART No.	BARCODE
1 L	XHD001	5010373888506
4.55 L	XHD455	5010373888513
20 L	YHD020	5010373055274

60+ High Mileage

Specifications: API SL/CF, ACEA A3/ B3

Carlube 60+ high mileage is a top quality mineral oil primarily formulated for engines with 60,000 miles or more on the clock, but can also be used in all engines where a 15w40 oil is recommended.



SIZE	PART No.	BARCODE
4.55 L	XPQ455	5010373055410

15w40 Fleet

Specifications: API SL/ CF-4

Carlube Fleet 15w-40 is designed for use in all petrol and diesel engines (including injection and turbo-charged). An ideal oil for mixed fleet use, designed to provide superior protection under the most arduous of operating conditions.




SIZE	PART No.	BARCODE
20 L	SFE020	5010373054925
199 L	SFE199	5010373027561

Always refer to the vehicle/engine/machine/equipment manufacturers handbook to ensure appropriate product specification and compatibility.

Carlube Classic Oils

Carlube Classic Oils are a specialist range of lubricants designed for use in veteran, classic and vintage motor vehicles. The high quality, low detergent monograde mineral lubricants are suitable for use in naturally aspirated four stroke petrol and diesel engines and manual operated gearboxes of that age.

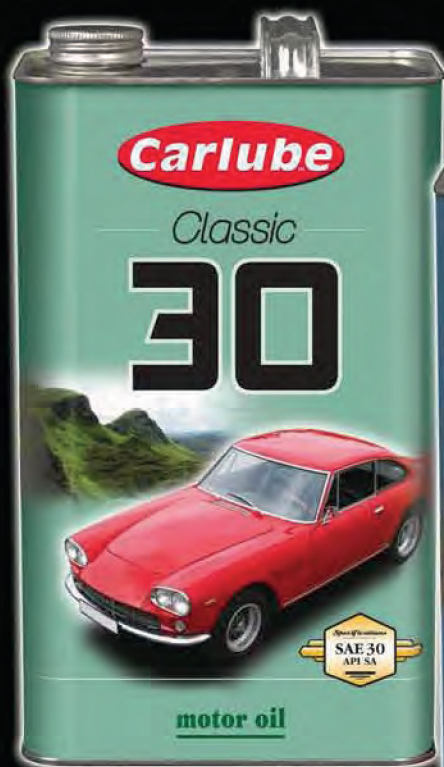


Classic 30

Carlube SAE 30 Classic Oil is a monograde mineral oil with no detergent additive pack for 4 stroke engines and is specially designed for classic vehicles requiring a straight or SAE 30 motor oil.

Specifications: SAE 30, API SA

SIZE	PART No.	BARCODE
5L	XAE030	5010373058152

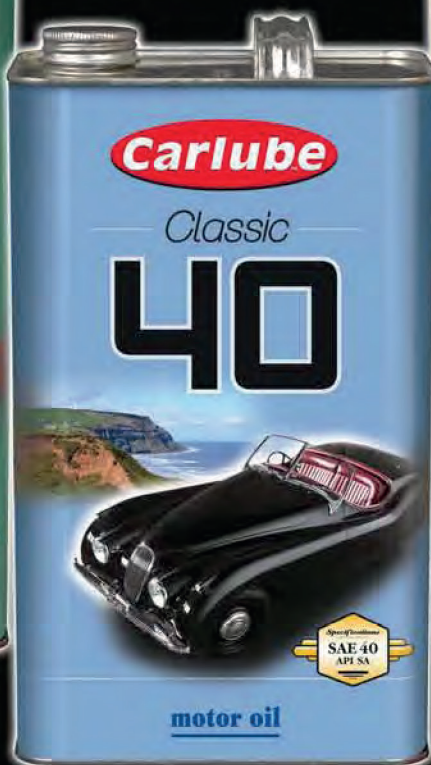

Classic 40

Carlube SAE 40 Classic Oil is a monograde mineral oil with no detergent additive pack for 4 stroke engines and is specially designed for classic vehicles requiring a straight or SAE 40 motor oil.

Specifications: SAE 40, API SA

SIZE	PART No.	BARCODE
5L	XAE040	5010373058169




Classic 20w50

Carlube 20w50 Classic Oil is a top quality motor oil, engineered to give excellent grade protection through all temperature conditions from cold start to high speed motorway driving.

Specifications: API SE/CC

SIZE	PART No.	BARCODE
5L	XAE250	5010373058176

CarlubeTM

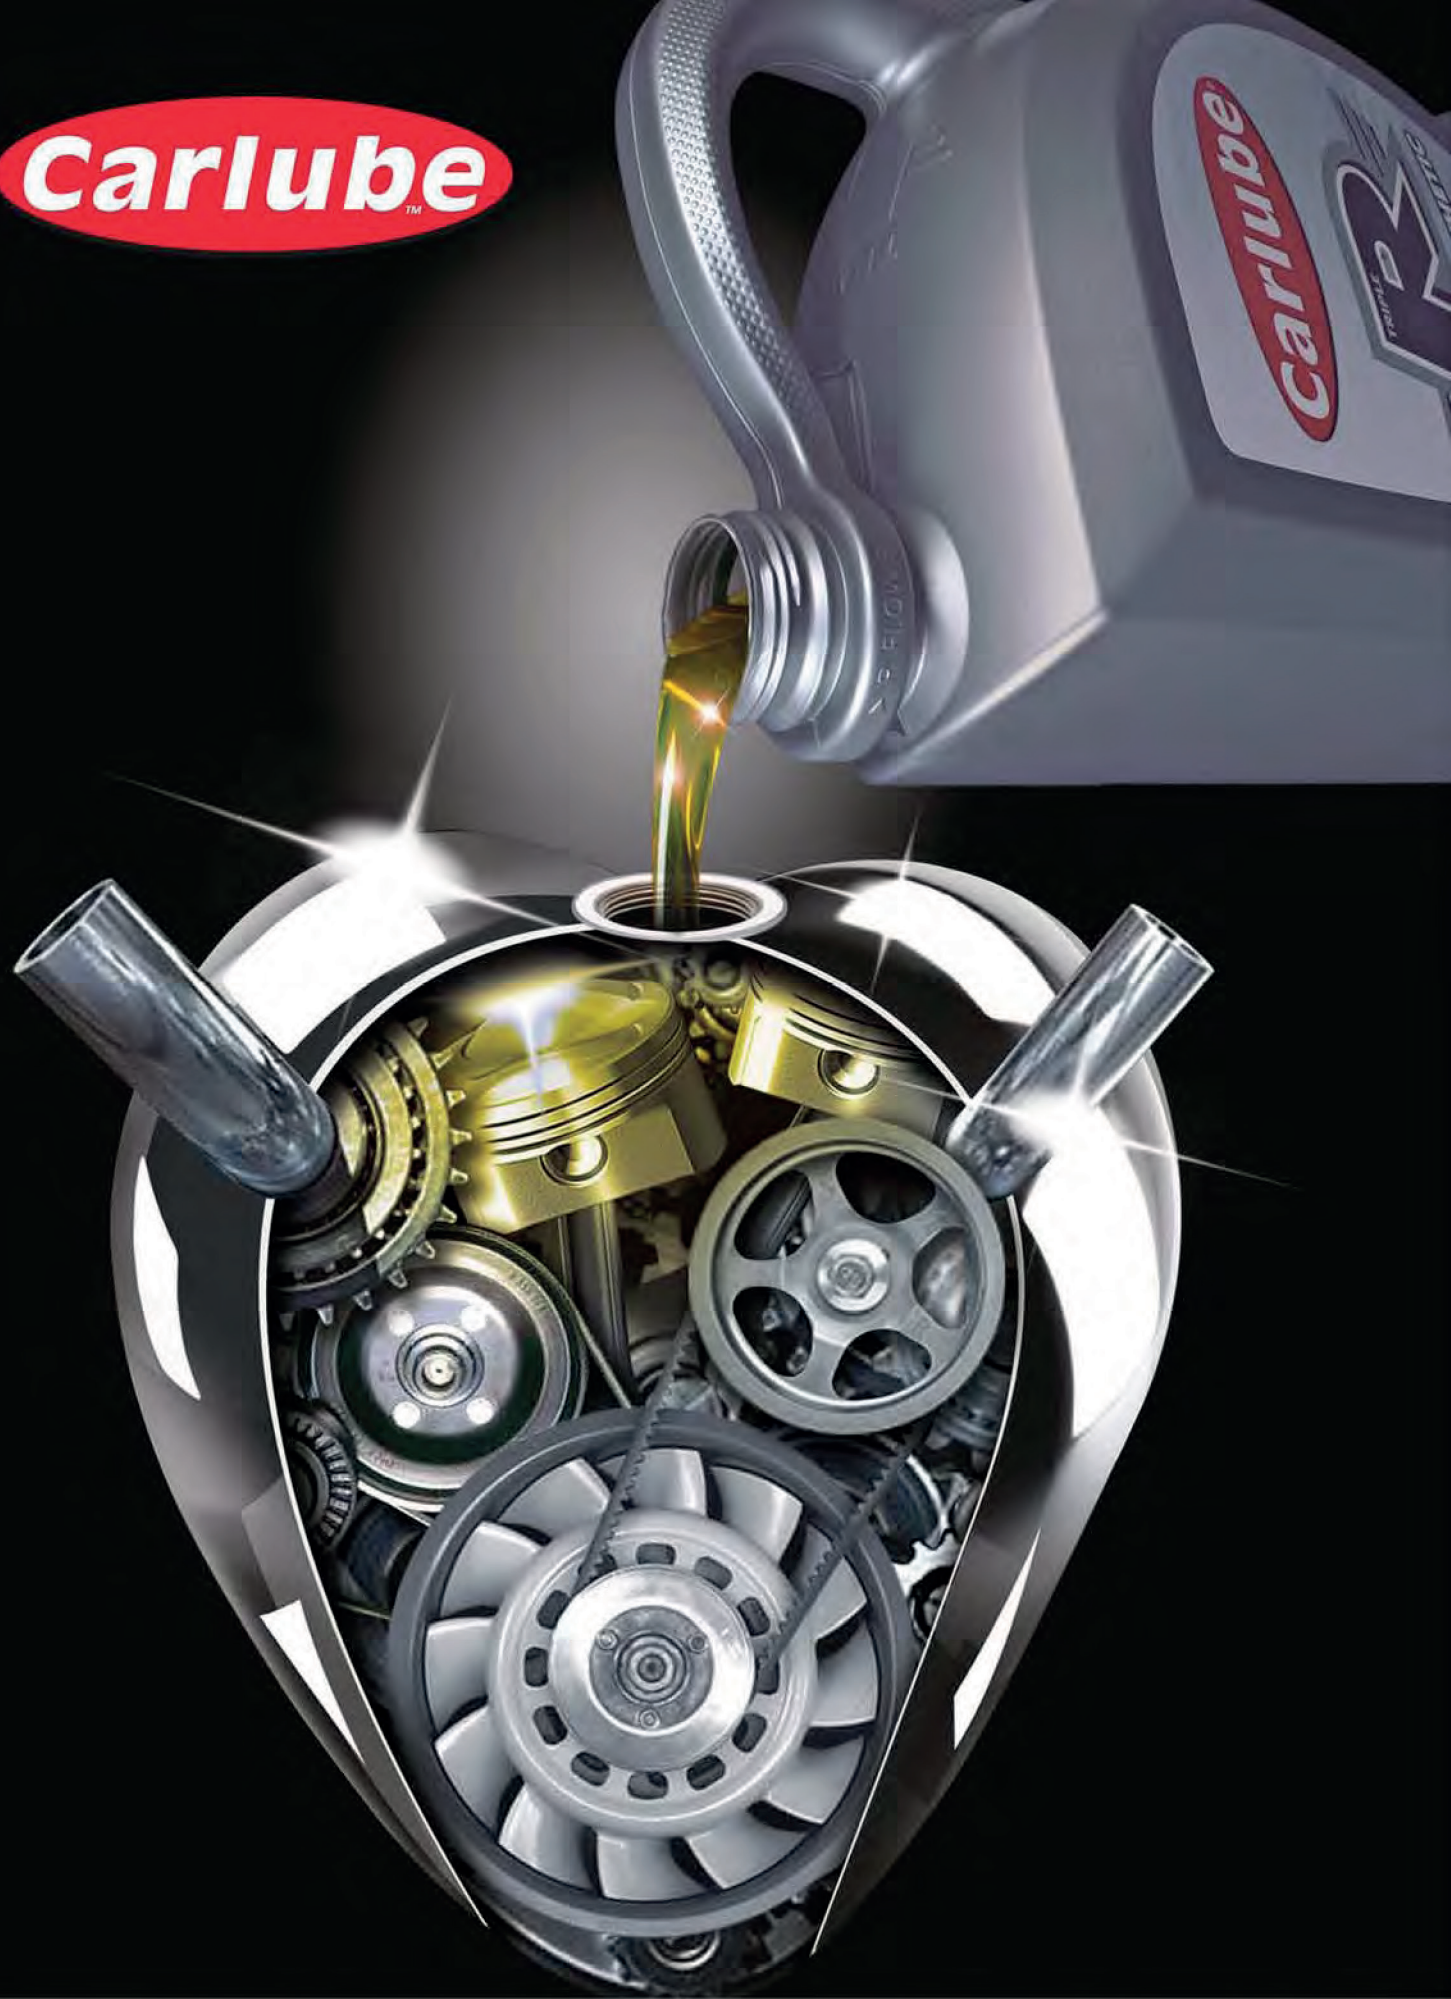

The **HEARTBEAT** *of your* **ENGINE**

Carlube™ Gear Oils

EP80w Gear Oil

Specification: GL-4

Carlube EP80w is a mineral based fluid suitable for older synchromesh gear boxes where the GL-5 specification is too high for the particular gearbox and could lead to clogging.

SIZE	PART No.	BARCODE
500ml	XEP501	5010373019467
1 L	XEP011	5010373019481
4.55 L	XEP455	5010373888186
25 L	YFY025	5010373025161



EP90 Gear Oil

Specification: GL-5

Carlube EP90 is a mineral based fluid specified for certain manual gearboxes and widely used in differential boxes where a GL-5 specification is required.

SIZE	PART No.	BARCODE
500ml	XEW501	5010373019597
1 L	XEW011	5010373019573
4.55 L	XEW455	5010373888223
25 L	YFX025	5010373024966



EP80w90 Gear Oil

Specification: API GL-5, MAN 342 M-2, ZF 05A, 07A, 12E, 16B/C/D, 17B, 19B, NATO 0-226

Carlube EP80w90 is a mineral based fluid suitable for certain manual gear boxes and widely used in hypoid, double reduction and spiral bevel back axles.

SIZE	PART No.	BARCODE
500ml	XEY501	5010373019832
1 L	XEY011	5010373019764
4.55 L	XEY455	5010373888261
25 L	YFK025	5010373023402



EP75w90 Semi-Synthetic Gear Oil

Specification: API GL-4/GL-5 ZF 05A, 12E, 17B, 19B, 16B

Carlube EP75w90 Semi-Synthetic gear oil is specially designed for modern 5 speed manual gearboxes.

SIZE	PART No.	BARCODE
500ml	XOG501	5010373019733
1 L	XOG100	5010373020777
4.55 L	XOG455	5010373020784
25 L	YFI025	5010373023389

EP75w90 Fully Synthetic Gear Oil

Specification: API GL-4/GL-5, ZF TE ML05A, Scania ST01: 0

Carlube EP75w90 fully synthetic is a new generation manual gear oil, specially formulated to provide the ultimate in gearbox protection for all driving conditions, in both passenger car and commercial vehicles. Carlube EP75w90 gear oil will also cover a number of viscosities including the 75w80, 75w85 and 80w90 grades which are commonly specified.



SIZE	PART No.	BARCODE
500ml	XZF500	5010373047866
1 L	XZF001	5010373045077
4.55 L	XZF455	5010373047873
25 L	YZF025	5010373047880

EP85w140 Heavy Duty Gear Oil

Specification: API GL-5 ZF 05A, 07A, 12E, 16B/C/D

Carlube Heavy Duty EP85w140 Gear oil is a mineral based fluid used in many heavy goods vehicles' back axles, giving total protection under heavy stress loading.



SIZE	PART No.	BARCODE
25 L	YEM025	5010373023396

MT-75 Manual Transmission Fluid

Specification: Ford M2C-186A

Carlube MT75 is a mineral based transmission fluid that has been specially developed to meet the requirements of the Ford MT75 and MTX75 Gearboxes, which are used in certain Fiestas, Escorts, Sierras, Granada/Scorpios, Galaxys and Transits.



SIZE	PART No.	BARCODE
1 L	MTF011	5010373019795

MTF-94 Manual Transmission Fluid

Specification: MTF-94

Carlube MTF94 is a mineral based transmission fluid that has been specially formulated to meet the requirements of gearboxes used in certain Honda, Rover/MG, Landrover, LDV & BMW Mini Vehicles.



SIZE	PART No.	BARCODE
1 L	MTF941	5010373040461

CarlubeTM Transmission Fluids

CVT-U

Continuously Variable Transmission Fluid

Carlube CVT Fluid is a fully synthetic, high performance transmission fluid formulated to protect against gear scuffing and wear to Continuously Variable Transmissions. Carlube CVT fluid is suitable for use in all belt and chain applications meeting the following specifications.

Specifications: Audi/VW (TL 52180; G 052 180), Ford (CVT30/ Mercon C), Honda (HMMF), Toyota (TC), Nissan (NS-2), Mitsubishi (CVTF-J1/ SP-III), Subaru (NS-2/ Lineartronic CVTF), Mini Cooper (EZL 799), Hyundai/ Kia (SP-III), Suzuki (TC/NS-2/CVT Green 1), Dodge/Jeep (NS-2/CVTF+4), GM/Saturn (DEX-CVT), Ford (CVT23), Mercedes Benz (236.20).

Note: Not recommended for Toyota and Ford Hybrid CVT units



SIZE	PART No.	BARCODE
1L	XVT001	5010373054703

ATF-LV

Low Viscosity ATF

Carlube ATF-LV is a low viscosity fully synthetic fluid suitable for multi-vehicle use. The low viscosity additive package is designed for new advances in Automatic Transmissions & is specially formulated to increase fuel economy in the latest vehicles on the road.

Specifications: Dexron VI, Mercon LV, JASO 1-A, Aisin Warner AW-1, Honda DW-1, Hyundai/Kia SP-IV, Hyundai NWS-9638, JWS 3324, Mitsubishi SP-IV, Mitsubishi ATF J2, Nissan Matic-S, Saab 93 165 147, Toyota WS



SIZE	PART No.	BARCODE
1 L	XLU001	5010373055533

ATF-U

Automatic Transmission Fluid

Carlube ATF-U is a fully synthetic transmission fluid offering advanced lubrication protection for Automatic transmissions which meets the following specifications.

Specifications: Ford Mercon V/SP, MB 236.6, BMW 7045E, Toyota T-IV, Mitsubishi/ Hyundai SP-II, Chrysler ATF, ATF 3+, ATF 4+, Honda Z1, Nissan Matic D, J, LT 71141, LWS 3309, Volvo 1161540 & VW/Audi G-055-025-AZ, Subaru ATF, Ford M2C-202-B.



SIZE	PART No.	BARCODE
500ml	XTU500	50766901
1 L	XTU001	5010373040560
4.55 L	XTU455	5010373042342
25 L	YFU025	5010373043592

ATF-G

Automatic Transmission Fluid

Carlube ATF-G is a mineral based fluid suitable for all Ford/Borg Warner automatic gearboxes and also power steering systems which specify an ATF type G fluid and a specification of M2C-33F/G.

Specification: Ford M2C-33G



SIZE	PART No.	BARCODE
500ml	XTF501	5010373019849
1 L	XTF011	5010373019788
4.55 L	XTF455	5010373888308
25 L	YFN025	5010373023365

ATF-Q

Automatic Transmission Fluid

Carlube ATF-Q is a mineral based Dexron II fluid widely used in most makes of automatic gearboxes and power steering systems where an ATF-A, ATF-D, ATF-D2 or ATF Dexron II D specification is demanded.

Specification: Dexron II D



SIZE	PART No.	BARCODE
500ml	XAT501	5010373019818
1 L	XAT011	5010373019900
4.55 L	XAT455	5010373888346
25 L	YFM025	5010373023488

ATF-Q3

Automatic Transmission Fluid

Carlube ATF-Q3 is a semi-synthetic Dexron III fluid which encompasses all the specifications of Dexron II D, Dexron II E and Ford specification Mercon, M2C-166H and M2C-195A.

Specification: Dexron III



SIZE	PART No.	BARCODE
500ml	XTE500	5010373019870
1 L	XTE100	5010373019887
4.55 L	XTE455	5010373018682
25 L	YTE025	5010373023358

Carlube™ Power Steering Fluid

Power Steering Fluid

Specifications: Dexron II D, Dexron III, Dexron II E, Ford Mercon M2C-166H and M2C-195A.

Carlube Power Steering fluid is a specialist fluid with anti-wear additives suitable for most power steering systems, where any of the specifications listed are required by the vehicle manufacturer.



SIZE	PART No.	BARCODE
500ml	XPF500	5010373025505
1 L	XPF001	5010373025512

CHF Hydraulic Power Steering Fluid

Specifications: VW G002 000/G004 000, VW TL52146, CHF 11S, BMW 81.22.9.407.758 MB 345.00, Opel B040.0070, Porsche 000.043.203.33, IS07308, Citroën LDS, Ford M2C-204-A

Carlube Power Steering and Suspension Fluid is a Fully Synthetic oil based green central hydraulic fluid. It is suitable for use in certain power steering units, suspension systems, traction control systems, electric soft tops and central locking systems.



SIZE	PART No.	BARCODE
500ml	HPF500	50766635
1 L	HPF001	5010373037911

Brake Fluid

Dot 3 Brake Fluid

Carlube Dot 3 is a Fully Synthetic brake & clutch fluid exceeding FMVSS 116 Dot 3 and SAE J1703 specifications. It will mix safely with other brake fluids conforming to these specifications.

Minimum boiling point: 205°C.

SIZE	PART No.	BARCODE
500ml	BRF050	50552306



Dot 4 Brake Fluid

Carlube Dot 4 is a Fully Synthetic brake & clutch fluid, mostly specified for Disc Brake Systems, giving high performance and protection exceeding FMVSS 116 Dot 3 & Dot 4, SAE J1703 and J1704 specifications. It will mix safely with other brake fluids conforming to these specifications.

Minimum boiling point: 230°C.

SIZE	PART No.	BARCODE
300ml	BFL300	50552290
500ml	BFL050	50552283
1 L	BFL100	50541089
4.55 L	BFL455	5010373038314
20 L	BFL020	5010373031513



Dot 4 ESP Brake Fluid

Carlube Dot 4 ESP is a Fully Synthetic brake & clutch fluid developed for use in vehicles with electronic stability program (ESP) systems, for improved braking and helping to reduce skidding.

It provides high performance and protection exceeding FMVSS 116 Dot 3 & Dot 4, SAE J1703 and 1704 specifications. It will mix safely with other brake fluids conforming to these specifications.

Minimum boiling point: 230°C.

SIZE	PART No.	BARCODE
500ml	BFE050	50766710



LHM Plus Brake and Suspension Fluid

Carlube LHM Plus is a special mineral fluid used in some Citroën, Jaguar and Rolls Royce brake & suspension systems and comprises highly refined mineral oils fortified with additives to ensure excellent low temperature performance combined with good anti-wear, corrosion oxidation protection.

Note: Damage to brake systems will occur if LHM is mixed with synthetic brake fluids.

SIZE	PART No.	BARCODE
1 L	LHM001	5010373020289

Dot 5.1 Brake Fluid

Carlube Dot 5.1 is an extra high performance Fully Synthetic brake & clutch fluid, specified for advanced brake systems, meeting FMVSS 116 Dot 5.1 specification. It will mix safely with other brake fluids conforming to this specification.

Minimum boiling point: 260°C.

SIZE	PART No.	BARCODE
500ml	BFG050	50552269





Hydraulic Oils

Carlube Hydraulic Oils are highly refined, fully-inhibited oils covering a wide range of viscosities from ISO 32 to ISO 68, all of which are of a HM grade and, in addition, two of the viscosities are available in HV (Super) grade, suitable for use in higher temperature environments.



PRODUCT	SIZE	PART No.	BARCODE
ISO 32	4.55 L	XFP455	5010373020845
ISO 32	25 L	YFP025	5010373023273
ISO 32	199 L	YFP199	5010373027738
ISO SUPER 32	25 L	YSH025	5010373023266
ISO SUPER 32	199 L	YSH199	5010373027745
ISO 46	25 L	YHK025	5010373023259
ISO 46	199 L	YHK199	5010373027752
ISO SUPER 46	25 L	YSL025	5010373023242
ISO 68	25 L	YHL025	5010373023235

Cutting Fluid



Cutting Fluid Non-Phenolic (NP)

Carlube Soluble Cutting Fluid is a traditional milky white cutting fluid which is low-odour and nitrate free, as well as containing an anti-corrosion additive package.

SIZE	PART No.	BARCODE
25 L	YRR025	5010373024973



Carlube™ Motorcycle Oils

2 Stroke Motorcycle Oil

Carlube 2 Stroke Motorcycle Oil is a high performance mineral oil with special low-ash additives, for use in most 2 Stroke engines, motorcycles, chainsaws and outboards.

Note: Do not use in high performance BIA-TCW outboards)

Specification: API TC. JASO FB.

SIZE	PART No.	BARCODE
500ml	XST501	5010373019771
1 L	XST011	5010373019535
4.55 L	XST455	5010373886391



2 Stroke Fully Synthetic

Carlube 2 Stroke fully synthetic motorcycle engine oil is suitable for high performance and off road motorcycle engines, both European and Japanese.

Carlube 2 Stroke oil exceeds API TC+ and JASO FC specifications making it suitable for both air and water cooled motorcycle engines.

SIZE	PART No.	BARCODE
1 L	XFS201	5010373019627



4 Stroke Semi-Synthetic

Carlube 4 Stroke is a semi-synthetic 10w40 motorcycle engine oil for high performance, modern motorcycles. Exceeds API SL and JASO MA specifications.

SIZE	PART No.	BARCODE
1 L	XFS451	5010373040362



4 Stroke Fully Synthetic

Carlube 4 Stroke fully synthetic is a 10w40 grade engine oil for high performance and race replica motorcycle engines. Exceeds API SL/SM and JASO MA2 specifications.

SIZE	PART No.	BARCODE
1 L	XFS401	5010373019610

Marine Oils

2 Stroke Marine Oil

Carlube Endurance Marine 2 Stroke is a high performance mineral oil specially developed to satisfy the requirements of water cooled outboard engines. The product provides the ultimate in performance demanded by the latest NMMA TC-W3 specification.

SIZE	PART No.	BARCODE
1 L	MTS011	5010373031308



Aquaslip Waterproof Grease

Carlube Aquaslip Waterproof grease provides high resistance to salt water corrosion and water washout, in addition to allowing good shear stability over a wide temperature range. Suitable for use on trailer wheel bearings, stern tubes, propeller shafts, cables and pulleys and other routine marine maintenance.

SIZE	PART No.	BARCODE
1 L	WPG500	5010373002919



CarlubeTM Agricultural Oils



10w30 Super Universal Tractor Oil

Carlube SUTO 10w30 is a mineral fluid suitable for engines, transmissions and hydraulics and also contains friction modifiers to prevent 'squawk' from oil-immersed brakes.

Specification: API CG-4/SF

SIZE	PART No.	BARCODE
25 L	YTN025	5010373044810



15w30 Super Universal Tractor Oil

Carlube SUTO 15w30 is a mineral fluid suitable for use in modern agricultural tractors, balers and combine-harvesters. 15w30 SUTO can be used in engines, transmissions and hydraulics.

Specification: API CG-4/SF

SIZE	PART No.	BARCODE
25 L	YTS025	5010373023327



Chainsaw Oil

Carlube Chainsaw Oil is specially formulated from solvent refined paraffinic base oil, treated with additives to prevent the oil being flung off the chain, thus minimising wear. It is recommended, primarily, for the bars and chains of pump-fed chainsaws, but can also be used in pressure-fed chainsaws.



SIZE	PART No.	BARCODE
1 L	XPM011	5010373038598
4.55 L	XPM455	5010373888858

2 Stroke Lawnmower Oil

Carlube 2 stroke lawnmower oil is suitable for petrol engines in both 'in-tank' petrol mix systems and metered lubrication injection systems. Carlube 2 stroke lawnmower oil will mix freely with petrol.



SIZE	PART No.	BARCODE
500ml	XLN501	5010373019504

4 Stroke Lawnmower Oil

Carlube 4 stroke lawnmower oil is blended from the highest quality oils and additives and is suitable for multi and single cylinder engines.



SIZE	PART No.	BARCODE
500ml	XLN501	5010373019559
1 L	XLN011	5010373037973

Ancillaries

Hydrolastic Suspension Fluid

Carlube Hydrolastic Suspension Fluid is a speciality product which has been specifically designed for Hydrolastic suspension systems fitted to rover (British Leyland) vehicles.

SIZE	PART No.	BARCODE
4.55 L	XHS455	5010373888957



Flushing Oil

Carlube Flushing Oil is a low viscosity SAE 20w monograde oil, designed to search the engine and clean out unwanted and harmful engine sludge.

SIZE	PART No.	BARCODE
4.55 L	XFL455	5010373888575



Penetrating Oil

Carlube Penetrating Oil with graphite is developed to penetrate corroded and rust affected parts. The micro-fine platelets of the colloidal graphite aids the release of seized assemblies, such as over-tight joints, bolts etc.

SIZE	PART No.	BARCODE
125ml	XOP125	5010373005002

Handy Oil

Carlube General Purpose Handy Oil is a light oil suitable for a wide variety of uses- in the car, the home and general DIY. It is designed to give lubrication and added protection against rust and seizure.

SIZE	PART No.	BARCODE
125ml	XHH125	5010373004999



Oil Granules

Carlube Absorbent Granules are used to soak up and absorb virtually all liquid spills.

SIZE	PART No.	BARCODE
20 L	DCG020	5010373025154